



DS3

The most powerful Dual Microinverter

- One microinverter connects to two modules
- Max output power reaching 730VA or 880VA
- Two input channels with independent MPPT
- Reactive Power Control
- Maximum reliability, IP67
- Encrypted Zigbee Communication
- Safety protection relay integrated


PRODUCT FEATURES

APsystems 3rd generation of dual microinverters are reaching unprecedented power outputs of 730VA or 880VA to adapt to today's larger power module. With 2 independent MPPT, encrypted Zigbee signals, the DS3L and DS3 benefit from an entirely new architecture and are fully backwards compatible with the QS1 and YC600 microinverters.

The innovative and compact design make the product lighter while maximizing power production. The components are encapsulated with silicone to reduce stress on the electronics, facilitate thermal dissipation, enhance waterproof properties and ensure maximum reliability of the system via rigorous testing methods including accelerated life testing. A 24/7 energy access through apps or web-based portal facilitates remote diagnosis and maintenance.

The new DS3 series is interactive with power grids through a feature referred to as RPC (Reactive Power Control) to better manage photovoltaic power spikes in the grid. With a performance and an efficiency of 97%, a unique integration with 20% less components, APsystems DS3L & DS3 are a game changer to residential and commercial PV.

WIRING SCHEMATIC

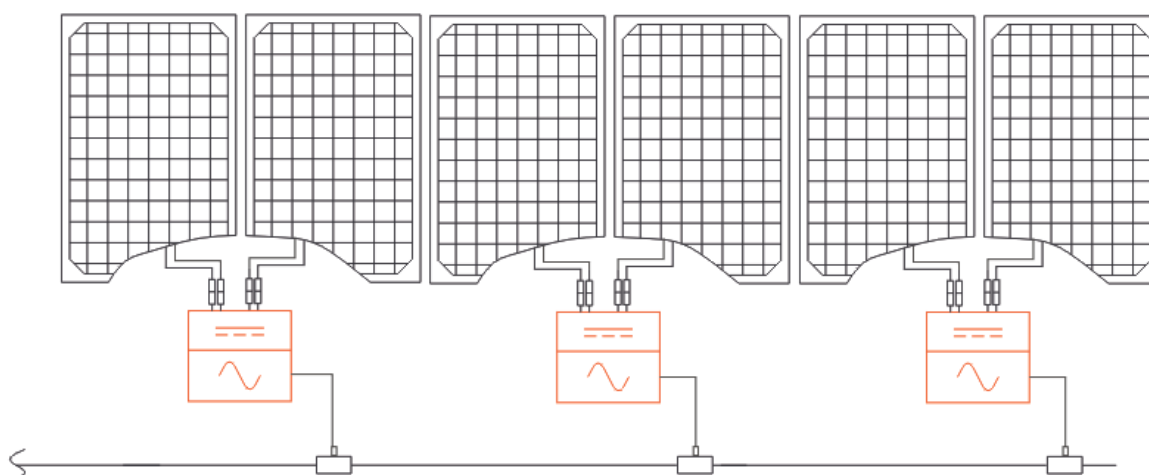

Datasheet | DS3 Microinverter Series

Model	DS3L	DS3
Input Data (DC)		
Recommended PV Module Power (STC) Range	255Wp-550Wp+	300Wp-620Wp+
Peak Power Tracking Voltage	30V-55V	
Operating Voltage Range	16V-55V	
Maximum Input Voltage	60V	
Maximum Input Current	18A x 2	20A x 2

Output Data (AC)		
Maximum Continuous Output Power	730VA	880VA
Nominal Output Voltage/Range*	230V/184V-253V	
Nominal Output Current	3.2A	3.8A
Nominal Output Frequency/ Range*	50Hz/48Hz-51Hz	
Power Factor(Default/Adjustable)	0.99/0.8 leading...0.8 lagging	
Maximum Units per 20A Branch**	6	5

Efficiency		
Peak Efficiency	97%	
CEC Efficiency	96.5%	
Nominal MPPT Efficiency	99.5%	
Night Power Consumption	20mW	

Mechanical Data		
Operating Ambient Temperature Range	- 40 °C to + 65 °C	
Storage Temperature Range	- 40 °C to + 85 °C	
Dimensions (W x H x D)	281mm x 231mm x 41.3mm	
Weight	2.6kg	
AC Bus Cable	2.5mm ²	
DC Connector Type	MC4	
Cooling	Natural Convection - No Fans	
Enclosure Environmental Rating	IP67	

Features		
Communication (Inverter To ECU)	Encrypted ZigBee	
Isolation Design	High Frequency Transformers, Galvanically Isolated	
Energy Management	Energy Management Analysis (EMA) system	
Warranty***	10 Years Standard ; 20 Years Optional	

Compliances		
Safety, EMC & Grid Compliances	EN 62109-1; EN 62109-2; EN 61000-6-1; EN 61000-6-3; UNE217002,UNE206007-1,RD647,RD1699,RD413; CEI 0-21; VDE0126-1-1,VFR2019,UTE C15-712-1,ERDF-NOI-RES_13E; EN 50549-1; VDE-AR-N 4105	

*Nominal voltage/frequency range can be extended beyond nominal if required by the utility.
 Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area * To be eligible for the warranty, APsystems microinverters need to be monitored via the EMA portal. Please refer to our warranty T&Cs available on emea.APsystems.com

© All Rights Reserved
 Specifications subject to change without notice please ensure you are using the most recent update found at web : emea.APsystems.com

European offices

APsystems
 Cypresbaan 7, 2908LT, Capelle aan den IJssel, The Netherlands
 Tel : 031-10-2582670
 Email : emea@apsystems.com

APsystems
 Rue des Monts d'Or, ZAC de Follieuses Sud-Les Echets,
 01700 Miribel, France
 Email : emea@apsystems.com | Tel: +33-4-81 65 60 40